
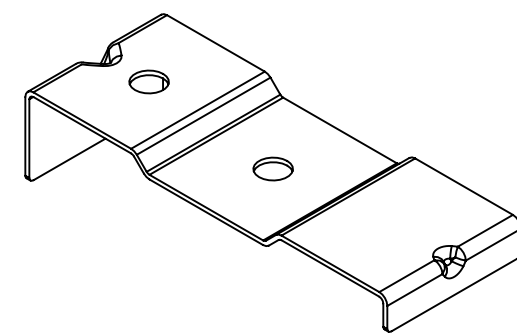


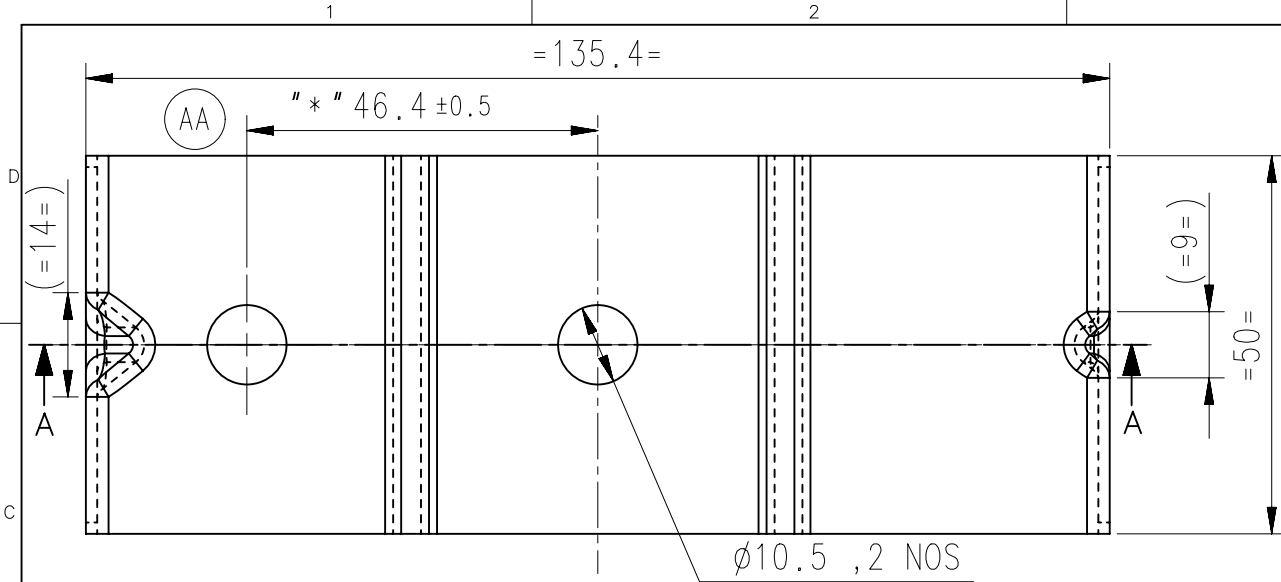



ISOMETRIC VIEW  
SCALE 1:2

| UNSPECIFIED TOLERANCES: |  |           |
|-------------------------|--|-----------|
| 1. FORMING TO FORMING   |  |           |
| <500                    |  | ±0.5      |
| >500                    |  | ±0.8      |
| 2. CD BETWEEN HOLES     |  |           |
| IN ONE PLANE            |  | ±0.2      |
| IN DIFF PLANE           |  | ±0.5      |
| 3. FORM TO PIERCE       |  | ±0.5      |
| 4. ANGULAR TOLERANCE    |  | ±1°       |
| 5. HOLE SIZES           |  | +0.2/-0   |
| 6. SLOT SIZES           |  | ±0.8      |
| 7. GENERAL TOLERANCE    |  |           |
| UP TO 300               |  | ±0.8      |
| ABOVE 300               |  | ±1.0      |
| 8. FLANGE WIDTH         |  | +1.0/-0.7 |
| 9. JOGGLE DEPTH         |  | +0.3/0    |

NOTE:-

1. NON DIMENSIONAL PART INFORMATION SHOWN ON THE DRAWING IS FOR REFERENCE ONLY.
2. ALL UNSPECIFIED OUTSIDE RADII SHOULD BE ONE METAL THICKNESS.
3. PART MUST BE FREE FROM FRACTURE, FLASH, SHARP EDGES & ANY SURFACE IMPERFECTIONS, THAT MAY AFFECT FIT OR FUNCTION OF THE PART.
4. PART MUST BE FREE FROM STRETCHING, SCORING MARKS & WRINKLES.
5. THIS PART IS SAME AS 007543841C1 EXCEPT FOR "\*" MARKED DIM

DEVELOPMENT SIZE: 175 X 50 X 1.5mm

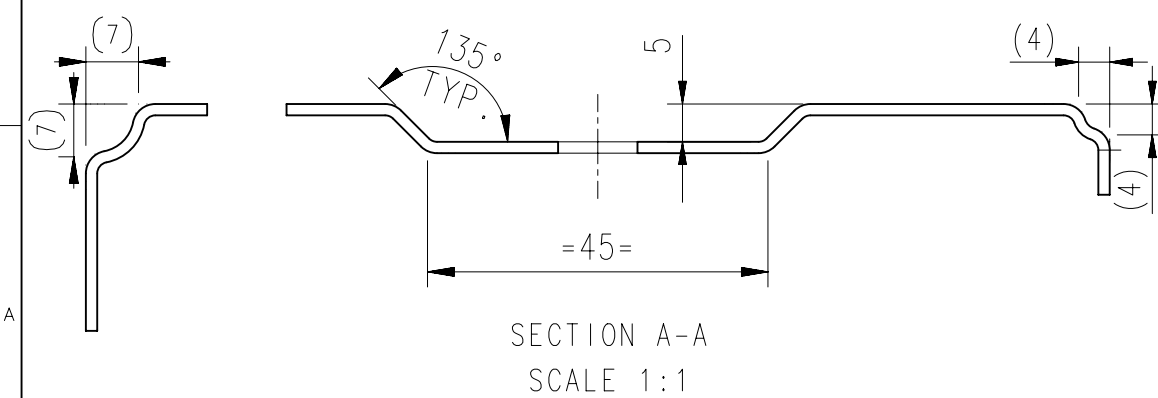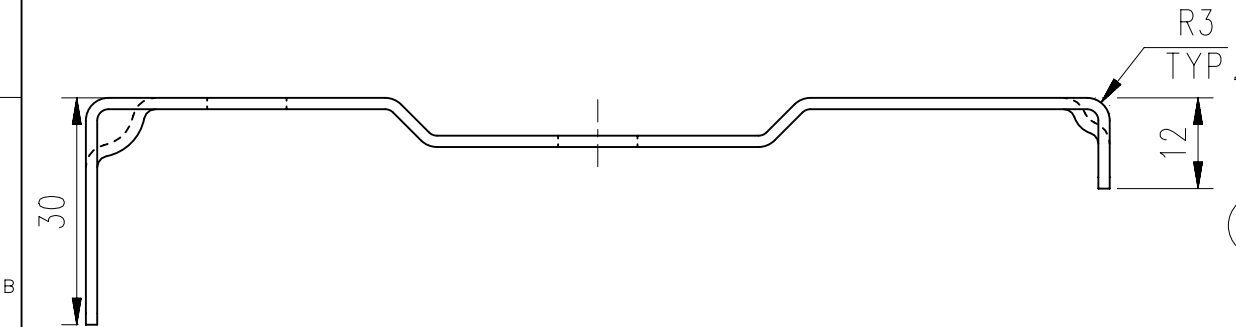

SECTION A-A  
SCALE 1:1

|                                                                                                                               |              |                                               |           |
|-------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------------------------------|-----------|
| <b>&lt;SC&gt; :SIGNIFICANT CHARACTERISTICS</b>                                                                                |              | <b>▽:CRITICAL CHARACTERISTICS</b>             |           |
| BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.                                       |              | <b>MAHINDRA &amp; MAHINDRA LIMITED</b>        |           |
| UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989                                                                                 |              | TRACTOR DIVISION                              |           |
| DIMENSIONS                                                                                                                    |              | KANDIVLI(EAST), MUMBAI 400 101, INDIA.        |           |
| <b>LINEAR</b><br>IN mm.                                                                                                       | OVER<br>UPTO | 0.5<br>3                                      | 3<br>6    |
| f FINE (X.XXX)                                                                                                                | ±0.05        | ±0.05                                         | ±0.1      |
| m MEDIUM (X.XX)                                                                                                               | ±0.1         | ±0.1                                          | ±0.2      |
| c COARSE (X.X)                                                                                                                | ±0.2         | ±0.3                                          | ±0.4      |
| v VERY COARSE (X)                                                                                                             | ±0.4         | ±0.6                                          | ±0.8      |
| <b>ANGULAR</b><br>IN deg.                                                                                                     | OVER<br>UPTO | 10<br>50                                      | 50<br>120 |
| f FINE (X.XXX)                                                                                                                | ±1°          | ±0°30'                                        | ±0°20'    |
| m MEDIUM (X.XX)                                                                                                               | ±1°          | ±0°30'                                        | ±0°15'    |
| c COARSE (X.X)                                                                                                                | ±1°          | ±0°30'                                        | ±0°10'    |
| v VERY COARSE (X)                                                                                                             | ±3°          | ±2°                                           | ±1°       |
| PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD. |              | MATERIAL :<br>MM21-"D", 1.5mm THK             |           |
| COMPUTER GENERATED DRAWING                                                                                                    |              | HEAT TREATMENT :<br>-----                     |           |
| DO NOT CHANGE MANUALLY                                                                                                        |              | AS PER G 00 0167                              |           |
| IF IN DOUBT, ASK                                                                                                              |              | DO NOT SCALE                                  |           |
| DRG SIZE :A4                                                                                                                  |              | ALL DIMENSIONS ARE IN mm.                     |           |
| CHECK DRG WITH LATEST CHANGE No                                                                                               |              | FIRST USED TRCR. MODEL<br><b>M-STAR CABIN</b> |           |
| SCALE 1:1                                                                                                                     |              | SHEET 1 OF 1                                  |           |
| UNIT QTY. : 1/TR                                                                                                              |              | WEIGHT : 0.104 kg.                            |           |

|                                   |     |                    |                                 |      |      |        |
|-----------------------------------|-----|--------------------|---------------------------------|------|------|--------|
| ER14I0002848                      | AB  | PRODUCTION RELEASE | PN                              | SN   | SD   | 051115 |
| ECN13P017374                      | AA  | D1                 | PART NO ADVANCED TO 007543841C2 | AVA  | OVK  | DHM    |
| HOLE OF 10.5 & RELATIVE DIM ADDED |     |                    | 14/11/13                        |      |      |        |
| E.R.NO.                           | LET | LOC                | REVISIONS                       | DSNR | CKR. | APPR.  |
|                                   |     |                    | DATE                            |      |      |        |